

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 July 2005 (28.07.2005)

PCT

(10) International Publication Number
WO 2005/068122 A1

(51) International Patent Classification⁷: **B23D 61/18,**
B28D 1/08

(21) International Application Number:
PCT/NO2004/000010

(22) International Filing Date: 15 January 2004 (15.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **GLOBAL
TOOL MANAGEMENT AS** [NO/NO]; Boks 84,
NO-2858 Kapp (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RAMFJORD, Harald**
[NO/NO]; Frusethenga 57, N-2817 Gjøvik (NO).

(74) Agent: **TANDBERGS PATENTKONTOR AS**; Boks
7085, N-0306 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: **DIAMOND CUTTING BELT**

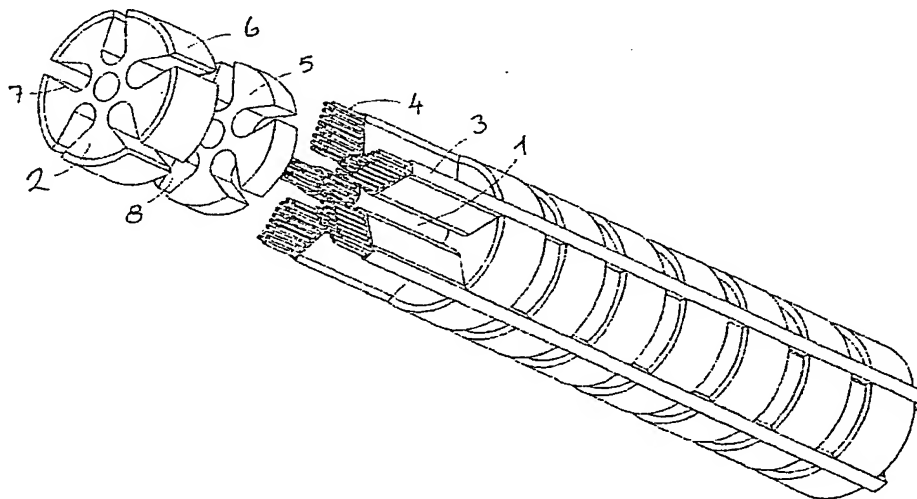

(57) Abstract: Cutting belt for the use in cutting structures by sawing, said belt comprising diamonds for the cutting action, comprising a reinforced, continuous rubber core (1), alternating a bead core (2) having an outer surface (6) comprising diamonds and a rubber spacer (5) positioned on said rubber core (1), a number of rubber belts (3) comprising reinforcements (4) extending through corresponding openings (7, 8) in all the bead cores (2) respectively the rubber spacers (5), said belt being vulcanized to a closed loop, maintaining the relative positions between the rubber core (1), the bead cores (2), the rubber spacers (5) and the rubber belts (3).

WO 2005/068122 A1